

# Knife gate valve WB



## Knife gate valve WB

Stafsjö's knife gate valve WB is bi-directional and can therefore be installed in a pipe system independent of pressure direction. The valve has a full bore with no cavity which gives excellent flow characteristics and this makes it suitable for fluids, sludge and liquids with solids in suspensions such as water, waste water and bio mass.

WB has a coated valve body in cast iron or nodular iron, which has integrated flange gaskets up to DN 600. The valve is equipped with a gate in stainless steel and a sealing profile in Nitrile or EPDM which is reinforced with a steel core. The gland box is equipped with Stafsjö's box packing TwinPack™, to secure that no media reaches the surrounding environment. The WB valve is modular designed and it can easily be supplied with different types of actuators and accessories.

The WB valve is designed, manufactured, inspected and tested according to the European Pressure Equipment Directive (PED 97/23/EC) category I and II module A1. The valve is CE marked when it is applicable.

Other WB versions are the semi lugged WB11 and the fully lugged WB14, both available up to DN 300. For square flange connection we are able to supply WB11k with additional tapped holes for this or WB 12 which has a square fully flanged valve body.



### Reliable bi-directional sealing

The gate edge, which is precision machined in order to minimize friction and to lower operational force, faces the sealing profile and secures that the valve is tight in both pressure directions.



### Excellent flow characteristics

A straight full bore with no cavity, gives minimal pressure drop since the media can pass it practically unnoticed.



### A first-rate sealing

A gland box supplied with three layers of our TwinPack™, which is specially developed and made for Stafsjö's valves, secures that no media reaches surrounding environment.

## Design data

Sizes	Flange drilling	Face-to-face dimension	ATEX design	Corrosion protection
DN 350 - DN 1400	DN 350 - DN 1400: EN 1092 PN 10 ≥ DN 700: ANSI B16.5 Class 150 ANSI B16.47 Class 150, series A AS 2129 Table D and E	Stafsjö manufacturing standard	ATEX 94/ 9/EC II cat 3 G/D for zone 2 and 22 on request	Non-corrosive resistant materials are coated in colour RAL5015 acc. to Stafsjö's standard, which fulfill the require- ments in EN ISO 12944 class C3.

Other sizes, flange drillings, ATEX zones and corrosion protection on request.

Leakage rate	Pressure tests
EN 12266-1:2012 Rate A: no visually detectable leakage is allowed for duration of the test	Pressure tests are performed with water at 20° C according to EN 12266-1:2012. Pressure shell test: 1,5 times maximum allowable working pressure for open valve. Pressure seat tightness test: 1,1 times maximum allowable differential pressure for closed valve.

Maximum working pressure body at 20°C		Maximum differential pressure at 20°C	
DN	bar	DN	bar
350 - 400	6	350 - 400	6
500 - 600	4	500 - 600	4
700 - 1200	4 or 6	700 - 1200	4 or 6
1400	2 or 4	1400	2 or 4

## Basic equipment

A. Valve body				
DN	Material	Code	Type	Maximum temperature °C
350 - 600	Cast iron	(A)	EN-JL1040/GG25	200
700 - 1400	Nodular iron	(L)	EN-JS1050/GGG50	200

B. Gate	
Material	Type
Stainless steel	EN 1.4301/AISI 304
<i>Option:</i>	
Stainless steel	EN 1.4404/AISI 316L

C. Sealing profile		
Material	Code	Maximum temperature °C
Nitrile	(N)	100
EPDM	(E)	120

D. Box packing		
Material	Code	Maximum temperature °C
TwinPack™	(TY)	260

## Actuators

Manual	Code	Automatic	Code
Hand wheel <sup>1)</sup>	(HW)	Pneumatic cylinder	(EC)
Chain wheel <sup>2)</sup>	(CW)	Electric motor	(EM)
Bevel gear <sup>2)</sup>	(BG)	Hydraulic cylinder <sup>2)</sup>	(MH)

<sup>1)</sup> For recommended size, see page 5 column E.

<sup>2)</sup> For recommended size, see separate data sheet.

Double-acting pneumatic cylinder			Electric motor (AUMA multi-turn)		
DN valve	EC type	Force at 5 bar (kN)	DN valve	AUMA type	Attachment
350 - 500	EC 200	14,1	350 - 600	SA 10.2	F10/A
600	EC 250	22,1	700 - 900	SA 14.2	F14/A
700 - 1000	EC 320	36,2	1000	SA 14.6	F14/A
1200 - 1400	On request		1200 - 1400	SA 16.2	F16/A



The table above gives recommended cylinder sizes at normal operation with 5 bar air pressure. For other operating conditions, please contact Stafsjö or your local representative for advice.

Electric motors are mounted according to standard ISO 5210. The table above gives recommended motor sizes at normal operation. For other operating conditions, please contact Stafsjö or your local representative for advice.

The actuators are described in separate data sheets. For advice and information on other actuators or on ATEX-classified ones, please contact Stafsjö or your local representative.

## Specify the Stafsjö valve

Stafsjö's valves are modular designed and they can easily be customized with gate, sealing profile and box packings according to media and requirements, as well for actuators and accessories. Below are examples of how you can specify your Stafsjö valve. Further information is available on [www.stafsjo.com](http://www.stafsjo.com).

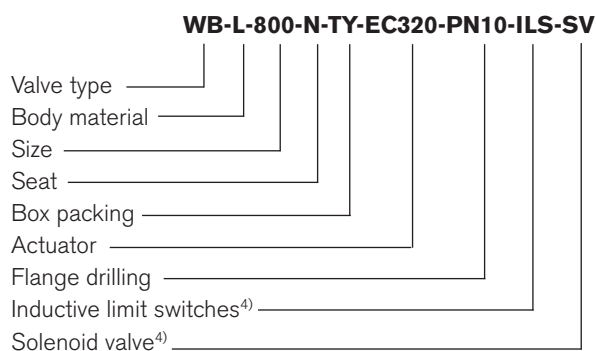
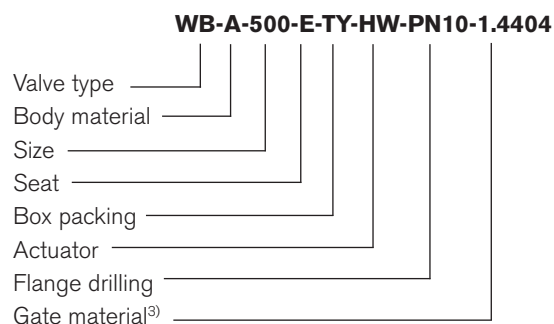


<sup>3)</sup> Alloy specified if it differ from standard.

<sup>4)</sup> All electronics must be specified in detail.

One piece valve body: DN 350 - DN 600

Two piece valve body: DN 700 - DN 1400

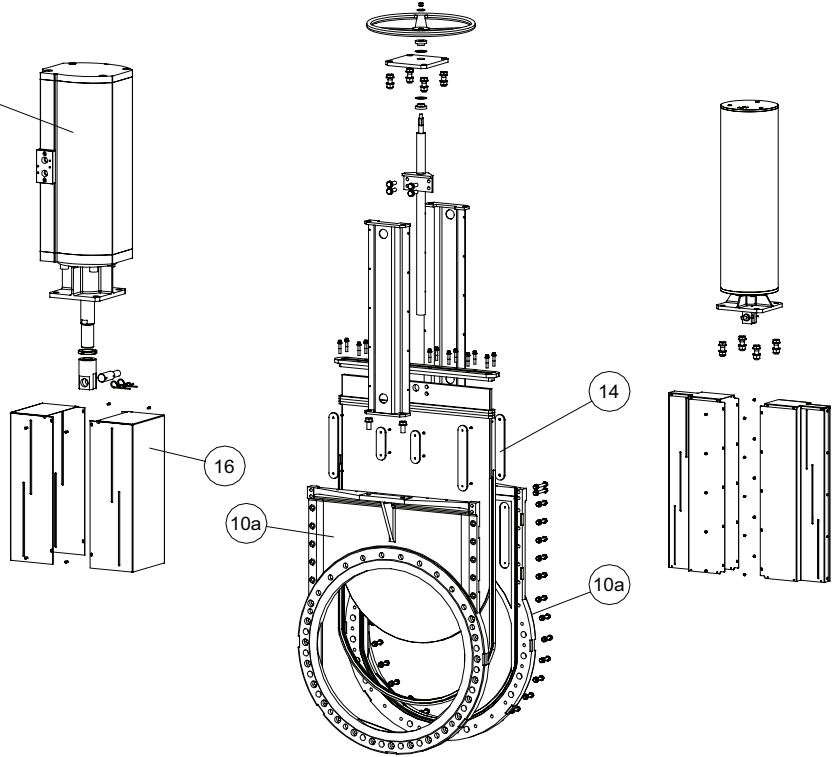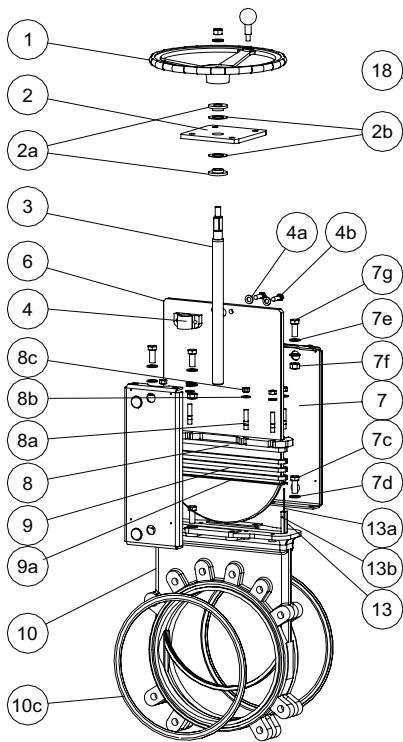


Part list

Pos.	Part	Material (Name)
1	Hand wheel	Coated cast iron (EN-JL1030/GG20)
2	Yoke	Coated steel (EN 1.0038)
2a	Bearing	Brass (CuZn39Pb3)
2b	Slide Washer	POM
3	Stem	Stainless steel (EN 1.4016)
4	Stem Nut	Brass (CuZn39Pb3)
4a	Washer	Stainless steel (A2)
4b	Bolt	Stainless steel (A2)
6	Gate	See equipment B
7	Beam	Coated steel (EN 1.0038)
7c	Bolt	Stainless steel (A2)
7d	Washer	Stainless steel (A2)
7e	Washer	Stainless steel (A2)
7f	Nut	Stainless steel (A2)
7g	Bolt	Stainless steel (A2)


<sup>5)</sup>Recommended spare parts

Pos.	Part	Material (Name)
8	Gland	Coated nodular iron (EN-JS1050/GGG50) or coated carbon steel (ASTM A216 grade WCB)
8a	Pinn bolt	Stainless steel (A2)
8b	Washer	Stainless steel (A2)
8c	Nut	Stainless steel (A2)
9 <sup>5)</sup>	Box packing	See equipment D
9a <sup>5)</sup>	Box bottom scraper	≤ DN 600 UHMWPE
10/a	Valve body	See equipment A
10c <sup>5)</sup>	Flange sealing	Only on ≤ DN 600 Nitrile
13 <sup>5)</sup>	Sealing profile	See equipment C
13a <sup>5)</sup>	Pin long	Stainless steel (EN 1.4301)
13b <sup>5)</sup>	Pin short	Stainless steel (EN 1.4301)
14	Guiding pads	POM-C
16	Gate guard, Not for HW	Coated steel (EN 1.0038)
18	Cylinder	See data sheet

One piece valve body: DN 350 - DN 600

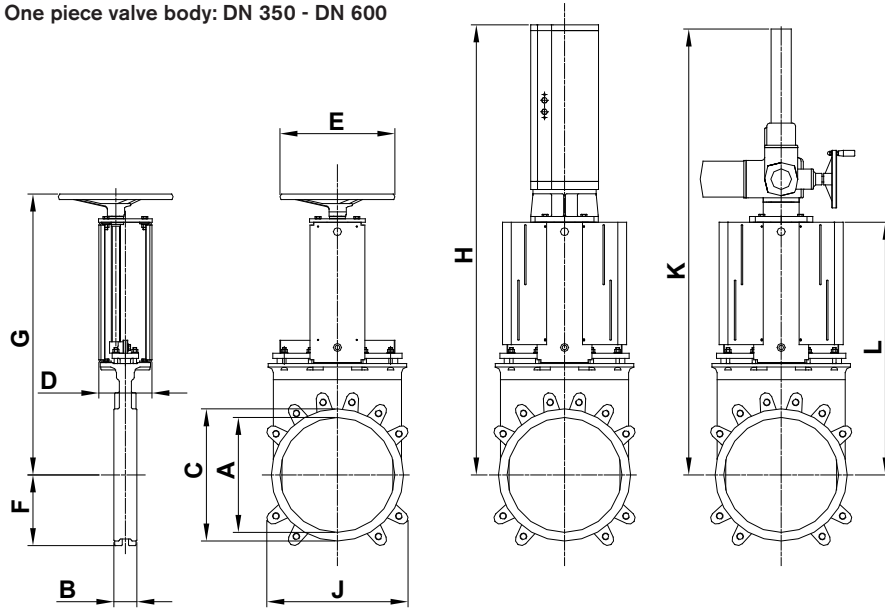


Two piece body: DN 700 - DN 1400

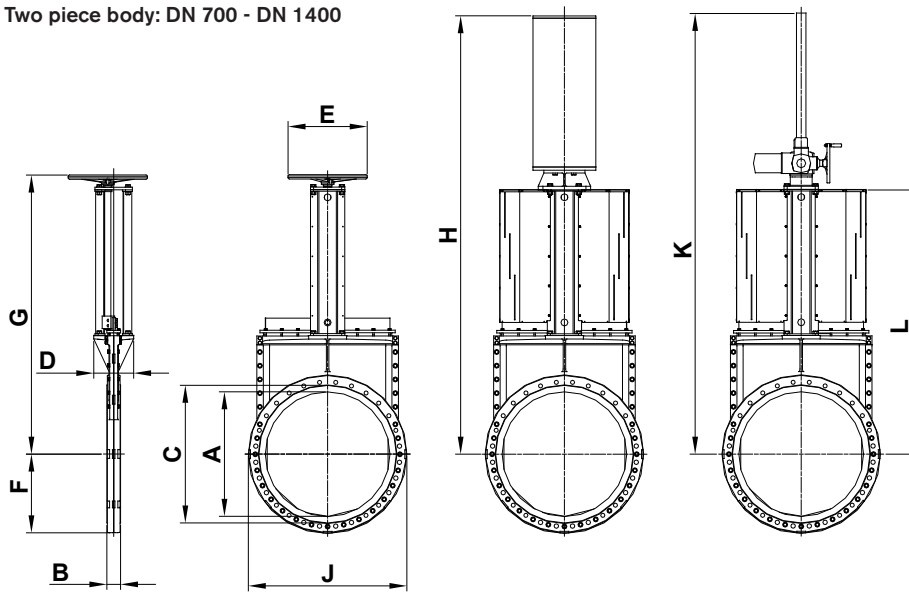

## Main dimensions

Dimensions (mm)												
DN	A	B	C	D	E	F	G	H	J	K	L	Weight <sup>6)</sup>
350	350	80	407	187	400	245	880	1470	490	1228	783	81
400	400	80	460	187	400	246	977	1567	490	1375	880	106
500	500	90	566	262	520	284	1225	1893	617	1706	1106	185
600	600	100	682	262	520	341	1429	2184	729	2011	1310	275
700	700	110	784	320	635	463	1647	2482	925	2643	1528	550
800	800	110	893	320	635	520	1857	2884	1040	2953	1738	605
900	900	110	999	320	635	574	2049	3075	1148	3244	1929	750
1000	1000	110	1104	320	635	631	2238	3400	1262	3535	2139	910
1200	1200	150	1316	500	-	749	-	-	1490	4297	2597	1700
1400	1400	170	1535	500	-	868	-	-	1735	4905	3063	2400

<sup>6)</sup> Weight in kg for valve equipped with hand wheel. DN 1400 with AUMA SA 16.2.  
Main dimensions are only for information. Contact Stafsjö for certified drawings.

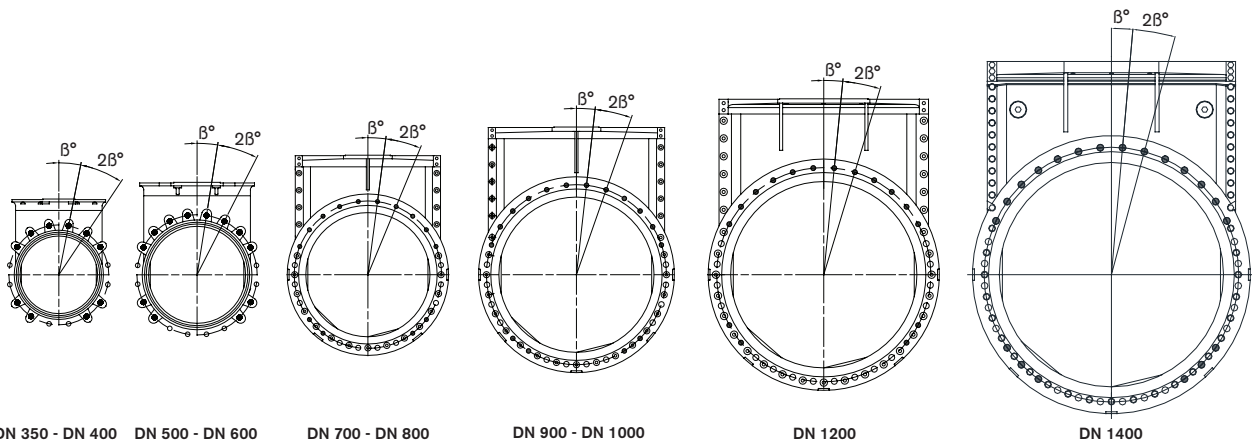

## Flange drilling according to EN 1092 PN10

Flange drilling information (mm)										
DN	350	400	500	600	700	800	900	1000	1200	1400
Outside flange diameter	505	565	670	780	895	1015	1115	1230	1455	1675
Bolt circle diameter	460	515	620	725	840	950	1050	1160	1380	1590
Number of throughgoing bolts (◦)	6	6	8	8	10	10	12	12	16	16
Number of tapped holes on each side (•)	10	10	12	12	14	14	16	16	16	20
Bolt size	M20	M24	M24	M27	M27	M30	M30	M33	M36	M39
Size of throughgoing holes in flange	Ø22	Ø26	Ø26	Ø30	Ø30	Ø33	Ø33	Ø36	Ø39	42
β°	11,25	11,25	9	9	7,5	7,50	6,43	6,43	5,63	5
Screw lengths <sup>7)</sup>	18	20	24	24	24	26	26	26	40	45

<sup>7)</sup> Add the values with the thickness of the pipe flanges, the washers and the estimated thickness of the gasket.

◦ Throughgoing holes


• Tapped holes

Further information is available on [www.stafsjo.com](http://www.stafsjo.com)



## Globally active. Locally represented.

AFRICA South Africa: Valve & Automation (Pty) Ltd, ASIA China: EBRO ARMATUREN (BEIJING) CO., LTD, India: Ebro Armaturen India Pvt. Ltd, Indonesia: Contromatic Prima Mandiri PT, Japan: SKC Co. Ltd, Malaysia: Precision Control SdnBnd, Philippines: EBRO ARMATUREN (PHILIPPINES) INC, Thailand: EBRO VALVES (Trading) Co. Ltd, Vietnam: EBRO VALVES (Thailand) Co., Ltd, AUSTRALIA/OCEANIA Australia: EBRO ARMATUREN Pacific PTY. LTD, New Zealand: H.J.Asmuss&Co.Ltd EUROPE Austria: EBRO ARMATUREN GmbH, Belgium: V.C.T. - Valve & Connector Technology n.v., Denmark: Valtor Industri A/S, Finland: Tecalemit Flow Oy, France: EBRO ARMATUREN, Germany: EBRO ARMATUREN Gebr. Bröer GmbH, Great Britain: EBRO Valves Ltd, Hungary: EBRO ARMATUREN Kft, Ireland: ESI Technologies Ltd, Iceland: Hédinn HF, Italy: EBRO VALVOLE SRL, The Netherlands: EBRO VALVES B.V., Norway: BAGGES AS, Poland: EBRO ARMATUREN GmbH, Portugal: AxFlow Comércio de Aquipamentos LDA, Russia: LesBumMash Ltd, Roitech and Sevkom, Spain: EBRO ARMATUREN ESPAÑA, S.L., Switzerland: EBRO Armaturen Est. & Co. KG, Sweden: Stafsjö Valves AB and Ahlsell Sverige AB, Turkey: EBRO ARMATUREN Otomasyon Sistemleri San ve Tic Ltd. Sti, Ukraine: EBRO ARMATUREN GmbH Representative office Kiev NORTH AMERICA Canada: Armour Valve Ltd, USA: EBRO ARMATUREN USA Inc. SOUTH AMERICA Argentina: ESCO ARGENTINA SA, Brazil: ELAN Equipamentos Industriais LTDA, Chile: Ebro Stafsjö Valves Chile Ltd For other countries, please contact us directly.



**Stafsjö**  
SINCE 1666